

# LX700/LHD700

Auditoriums  
Boardrooms  
Classrooms  
Houses of worship  
Rental staging  
Training rooms



*Lens sold separately*

## Quality presentation power

Offering a choice of XGA (1024 x 768) or full HD (1920 x 1080) resolutions at 7000 ANSI lumens with high contrast and vivid color, these inorganic LCD projectors pack a lot of punch in a portable package.

The Christie® LX700 and Christie LHD700 are single-lamp projectors featuring 4DColor™ technology that increases the color gamut by 20 percent over comparable 3LCD models, resulting in true-to-life color and improved image and video quality. Motorized lenses and digital keystone capabilities make these projectors easy to set up and use.

For full flexibility to meet your application's requirements, the Christie LX700 and Christie LHD700 include a variety of input capabilities and

a suite of optional lenses. The Christie LHD700 is quickly and easily configurable with third-party equipment using Crestron's RoomView® and AMX Discovery Device.

Both units were designed with AutoFilter, easy lamp access, and up to 3000 hours lamp life (in eco mode) to help reduce projector downtime. Imagine the savings in both service and maintenance costs!

In auditoriums, boardrooms, classrooms or houses of worship, these projectors provide reliable, true-to-life color images and video to give your presentations the high impact they deserve.

# CHRISTIE®

 **EVENT MANAGEMENT**  
EMIT | EMUK | EMFR | EMBE


Event Management (IT)  
via XXV Aprile, 68  
20068 Peschiera B.  
Milano - Italy  
Tel. +39 0255301866  
Fax +39 0251650666

Event Management (UK)  
Cope Farm  
Moorhurst LN  
Holmwood - Dorking  
Surrey RH5 4LJ London  
Ph. +44 1306712451


Event Management (FR)  
41, rue Barbès  
94200 - Ivry sur Seine  
Paris  
Ph. +33 645457938

Event Management (BE)  
93, rue de Florival  
1390 - Grez Doiceau  
Ph. +32 (0) 475 462 289

	LX700 (103-020103-01)	LHD700 (103-034108-01)
Image	brightness	• 7000 ANSI Lumens
	contrast	• 3000:1 (full on/off)
	uniformity	• 90% brightness uniformity (corner to corner)
Display	type	• 3 x 1.2" inorganic LCD with 4DColor technology
	native resolution	• XGA 1024 x 768 • Full HD 1920 x 1080
Lamp	type	• 330W • 380W
	estimated life	• Normal mode: 2000 hrs • Eco mode: 3000 hrs
Input	signals	• UXGA/SXGA+/SXGA/WXGA/XGA/SVGA/VGA, MAC, NTCS, PAL, SECAM, NTSC4.43, PAL-M, PAL-N • Video (480i, 480P, 720P, 1080i, 1080p, 1080psf)
	scan rates	• Horizontal: 15-120kHz • Vertical: 38-120Hz
Inputs, control and networking	inputs	• Input 1: DVI-D x 1 (HDCP compliant), D-Sub15 x 1 • Input 1: DVI-D x 1 (HDCP compliant), HDMI x 1 (V1.3 with Deep Color), D-Sub15 x 1 • Input 2: 5-BNC (R, G, B, H, V & Y, Pb/Cb, Pr/Cr & Composite) • Input 3: S-video – DIN 4-pin x 1 • RCA x 3 (Video/Y, Pb/Cb, Pr/Cr)
	control	• Serial input: Dsub-9 x 1 • CCM-LX input connector • Serial output: Dsub-9 x 1 • R/C jack: mini jack x 1
Optical system	• Motorized zoom, focus and lens shift • Mechanical light shutter	
Lenses <sup>1</sup>	fixed	• 0.8:1 (103-131106-XX) • 0.8:1 (103-140106-XX)
	zoom	• 1.3-1.8:1 (38-809047-XX) • 1.3-1.8:1 (103-141107-XX) • 1.8-2.4:1 (38-809051-XX) • 1.8-2.3:1 (103-142108-XX) • 2.4-4.3:1 (38-809048-XX) • 2.3-4.2:1 (103-143109-XX) • 4.3-6.0:1 (38-809068-XX) • 4.3-6.0:1 (38-809068-XX) • 5.7-9.0:1 (103-123107-XX)
	offsets	• Digital keystone: V ±30° H ±30° • Digital keystone: V ±40° H ±20° and 3D Keystone™
	offsets	• Digital keystone: V ±30° H ±30° • Digital keystone: V ±40° H ±20° and 3D Keystone™
Accessories	standard	• Quick set-up manual • Real Color Management software instruction • Lens spacer for option lenses • Light-block sheet • Mounting clamp • Lens cover strap • Power cord • AC cord UL type (NEMA 6-20P plug type) 3 meters • AC cord European 2P plug type 3 meters • Computer cable (Dsub15-Dsub15) • Remote control
	optional	• CCM-LX Network Module
Power requirements	operating voltage	• AC 100-120V ±10% • AC 200-240V ±10%
	operating current	• 5.55A (max) • 6.0A (max)
	consumption	• 491W (Lamp normal 100-120V) • 500W (Lamp normal 100-120V) • 499W (Lamp normal 200-240V) • 520W (Lamp normal 200-240V)
	dissipation	• 1703 BTU • 2020 BTU
Dimensions	size	• (LxWxH): 17 x 14.5 x 7.36" (439.9 x 370.0 x 187.0mm) <sup>3</sup>
	shipping size	• (LxWxH): 24.8 x 19.3 x 15.2" (630 x 492 x 388mm)
	weight	• 25.1lbs (11.4kg)
	shipping weight	• 35.1lbs (15.9kg)
Noise	Normal mode: 39dBA	Normal mode: 42dBA
	Eco mode: 35dBA	Eco mode: 38dBA
Operating environment	• Temperature: 41-104°F (5-40°C) • Storage temperature: 14-140°F (-10-60°C) • Humidity: 20-80% non-condensing • Altitude: 0-8858ft (0-2700m)	
Enhanced feature sets	• 4DColor technology • Crestron RoomView <sup>2</sup> • AMX Device Discovery <sup>2</sup> • Edge blending and color matching capable <sup>2</sup> • 360 degree on-axis rotation • PiP and PbP <sup>2</sup> • Stackable design • Native 16:9; selectable aspect ratio 4:3 and true mode <sup>2</sup> • Intuitive GUI • Front and rear infrared sensors for IR keypad • Auto discoloration prevention with 3D-AUC technology • Top access to LCD panels	
Regulatory approvals	• This product conforms to the following regulations related to product safety, environmental requirements and electromagnetic compatibility (EMC); FCC, Part 15, Subpart B, Class A; EN55022/ CISPR22 Class A; EN55024 / CISPR24; IEC 60950-1 • UL 60950-1; CAN/CSA C22.2 No. 60950-1; Directive (EC) 2002/95/EC (RoHS); Directive 2002/96/EC (WEEE); Regulation (EC) No. 1907/2006 (REACH) • Certifications marks: cULus (Canada & US), CE (EU), CCC (China), GoS-TR (Russia), KC (Korea), PSE (Japan), C-Tick (Australia & New Zealand)	
Limited warranty	• Projector: three years parts and labor • Lamp: 120 days or 500 hours (whichever comes first)	

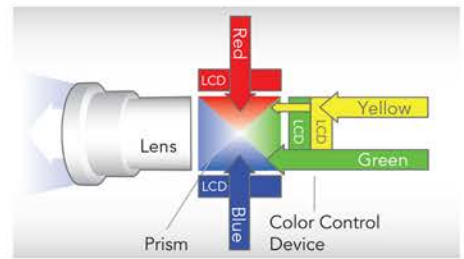

▲ 4DColor technology

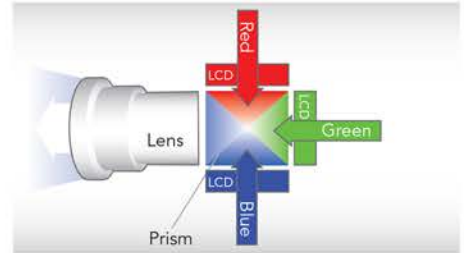

▲ Conventional 3-panel LCD – Real color performance is created by the color control device which separates yellow light from red and green panels and also boosts the brightness performance



▲ AutoFilter cartridge reduces maintenance cost – up to 10,000 hours before replacement

<sup>1</sup> Ships without a lens. <sup>2</sup> Applies only to LHD700 model. <sup>3</sup> Body dimensions, without lens with feet at minimum height position.

#### Corporate offices

Christie Digital Systems USA, Inc  
USA – Cypress  
ph: 714 236 8610

Christie Digital Systems Canada Inc.  
Canada – Kitchener  
ph: 519 744 8005

#### Worldwide offices

United Kingdom  
ph: +44 (0) 118 977 8000

Germany  
ph: +49 2161 664540

France  
ph: +33 (0) 1 41 21 44 04

Spain  
ph: +34 91 633 9990

Eastern Europe and  
Russian Federation  
ph: +36 (0) 1 47 48 100

United Arab Emirates  
ph: +971 (0) 4 299 7575

India  
ph: (080) 41468940

Singapore  
ph: +65 6877 8737

China (Shanghai)  
ph: +86 21 6278 7708

China (Beijing)  
ph: +86 10 6561 0240

Japan (Tokyo)  
ph: 81 3 3599 7481

Korea (Seoul)  
ph: +82 2 702 1601

#### Independent sales consultant offices

Italy  
ph: +39 (0) 2 9902 1161

South Africa  
ph: +27 (0) 317 671 347

